


## 120X100 MULTIFUNCTION SHOWER CUBICLE, CORNER ENTRY WITH 2 SLIDING DOORS AND 2 FIXED PANELS

Design Marco Pellici


Dimensions				Code	Installation		Mixer		Glass	Select the finishing																											
Dimensions	Shower tray (cm)	Total height (cm)	Access (cm)		D	S	M	T		1	Shiny white finish				Matt white finish																						
				C	*	Right	Left	Manual	Thermo-static	Clear	AN0	AN1	AN2	AN3	UN0	UN1	UN2	UN3	UU																		
<b>ESSENTIAL</b>																																					
					D	S	M1F-	T1F-	1	AN0	AN1	AN2	AN3	UN0	UN1	UN2	UN3	UU																			
100 x 80	H 4,5	209,5	44	<b>SKIA100</b>																																	
100 x 80	H 12,5	217,5	44	<b>SKIA109</b>																																	
120 x 80	H 4,5	209,5	51	<b>SKIA120</b>																																	
120 x 80	H 12,5	217,5	51	<b>SKIA129</b>																																	
120 x 90	H 4,5	209,5	54	<b>SKIA290</b>																																	
120 x 90	H 12,5	217,5	54	<b>SKIA299</b>																																	
120 x 100	H 4,5	209,5	58	<b>SKIA210</b>																																	
120 x 100	H 12,5	217,5	58	<b>SKIA219</b>																																	
<b>HAMMAM</b>																																					
					D	S	M5-	T5-	1	AN0	AN1	AN2	AN3	UN0	UN1	UN2	UN3	UU																			
100 x 80	H 4,5	211	44	<b>SKIA100</b>																																	
100 x 80	H 12,5	219	44	<b>SKIA109</b>																																	
120 x 80	H 4,5	211	51	<b>SKIA120</b>																																	
120 x 80	H 12,5	219	51	<b>SKIA129</b>																																	
120 x 90	H 4,5	211	54	<b>SKIA290</b>																																	
120 x 90	H 12,5	219	54	<b>SKIA299</b>																																	
120 x 100	H 4,5	211	58	<b>SKIA210</b>																																	
120 x 100	H 12,5	219	58	<b>SKIA219</b>																																	




SKILL A PEARL GREY



**S** Left



**D** Right

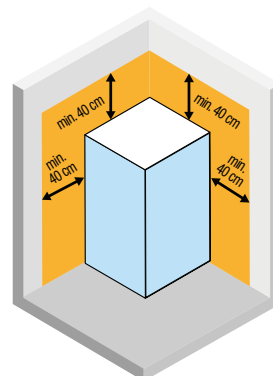

**RECIRCULATED  
AIR IN THE  
BATHROOM MUST  
BE GUARANTEED.**



SKILL A 120X80 SOFT WHITE



SKILL A 120X80 PEARL GREY




SKILL DUAL GLOSSY BLUE

## SKILL | FINISHES

### FINISHES



Shiny white




Soft White

### GLASS FINISHES




Clear


### STRIPES FINISHES




Glossy Blue  
cod N0




Light grey  
cod N1



Dove grey  
cod N2



Pearl grey  
cod N3



Soft White  
cod U

## SKILL | FUNCTIONS AND EQUIPMENT (available depending on the model)



Manual or Thermostatic mixer and Hand shower



Dome with Shower head



Body hydromassage



Cascade



Soap holder



Bluetooth



Foldaway seat




Electronic soft-touch control panel




Chromolight (hammam version)  
Led ceiling (essential version)



Steam generator + Steam and aroma dispenser



Immerse yourself in an emotional bath of lights with integrated Chromolight in the roof



Massage the body with one soft steam cloud and aromas of essential oils



Capacitive control simple and safe to use





Foldable seat to fit all uses of the cabin.




# SKILL






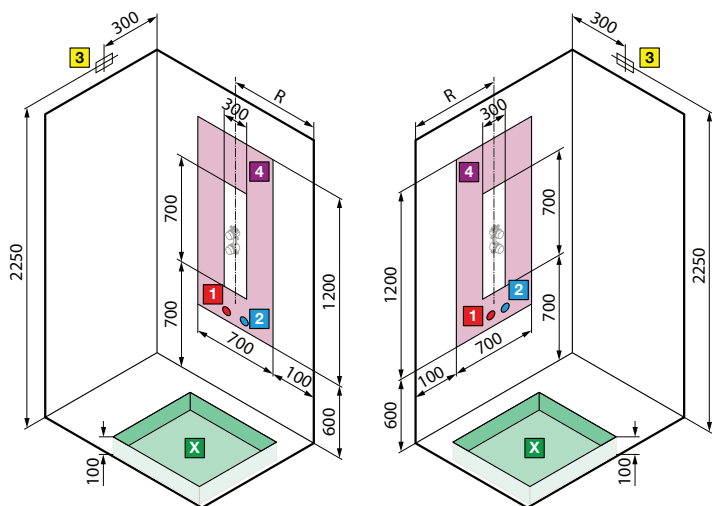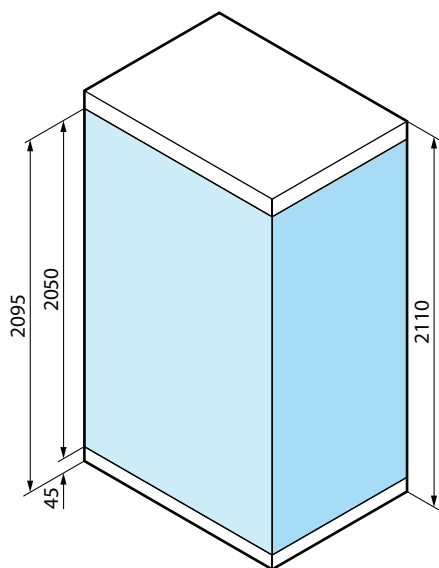

left version      right version  
for model **A100x80 - A120x80 - A120x90 - A120x100**

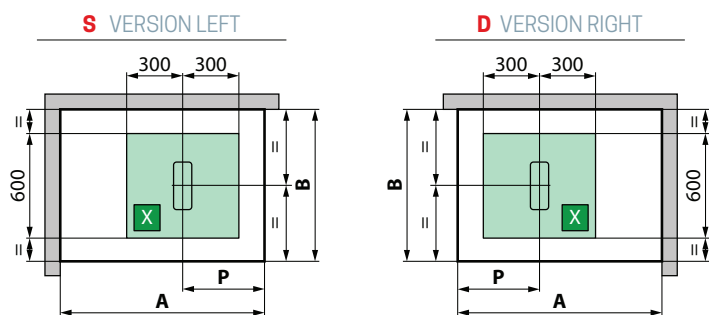

model	A ± 2	B ± 2	P	R
<b>A100x80</b>	1000	800	400	450
<b>A120x80</b>	1200	800	500	550
<b>A120x90</b>	1200	900	500	550
<b>A120x100</b>	1200	1000	500	550
<b>2P140x80</b>	1400	800	600	650



Visual inspection not possible



**EN55014-1**  
**EN55014-2**  
The product is certified according to electromagnetic compatibility standards

**WARNING!**  
It could be dangerous for pacemaker wearer


**HYDRAULIC CHARACTERISTICS:**  
Optimal dynamic pressure 2÷5 bar  
Hot water 1/2"  
Cold water 1/2"  
Drain connection ø 40 mm

**ELECTRICAL CHARACTERISTIC:**  
Supply voltage: 220-230 V  
Frequency: 50/60 Hz  
Maximum absorbed power: 2600 W  
Nominal power rating: 2500 W


**WARNING!** Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

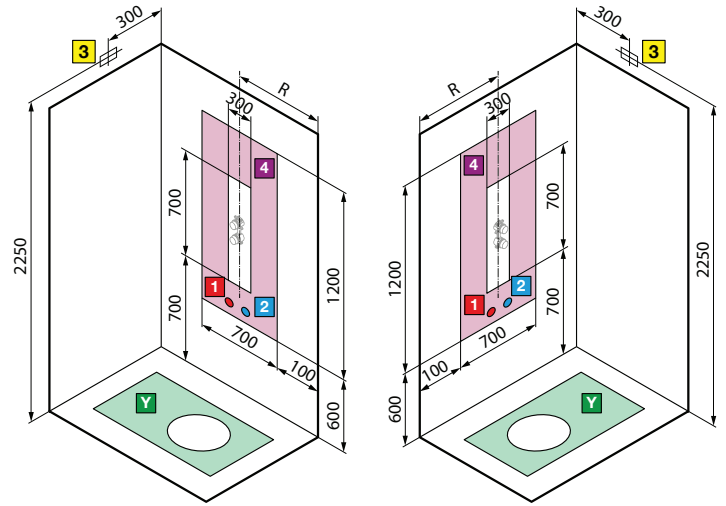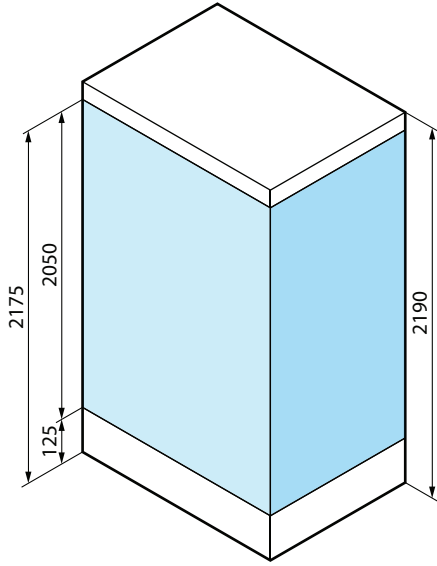

left version      right version  
for model **A100x80 - A120x80 - A120x90 - A120x100**

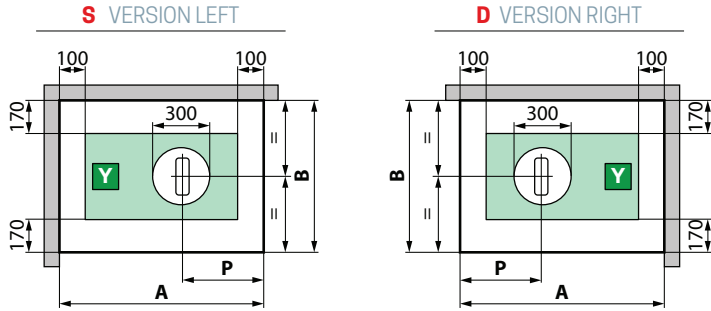

model	A ± 2	B ± 2	P	R
<b>A100x80</b>	1000	800	400	450
<b>A120x80</b>	1200	800	500	550
<b>A120x90</b>	1200	900	500	550
<b>A120x100</b>	1200	1000	500	550
<b>2P140x80</b>	1400	800	600	650

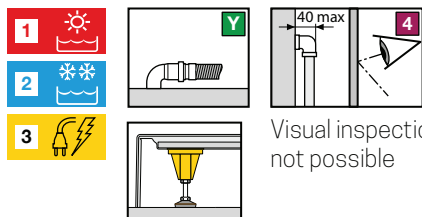

Visual inspection not possible

**EN55014-1**  
**EN55014-2**  
The product is certified according to electromagnetic compatibility standards

**WARNING!**  
It could be dangerous for pacemaker wearer

**HYDRAULIC CHARACTERISTICS:**  
Optimal dynamic pressure 2÷5 bar  
Hot water 1/2"  
Cold water 1/2"  
Drain connection ø 40 mm

**ELECTRICAL CHARACTERISTIC:**  
Supply voltage: 220-230 V  
Frequency: 50/60 Hz  
Maximum absorbed power: 2600 W  
Nominal power rating: 2500 W

**WARNING!** Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.