






SKILL 2P PEARL GREY



S Left



D Right

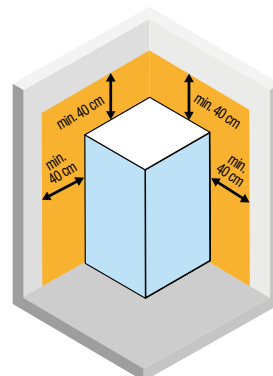

**RECIRCULATED
AIR IN THE
BATHROOM MUST
BE GUARANTEED.**



SKILL A 120X80 SOFT WHITE



SKILL A 120X80 PEARL GREY




SKILL DUAL GLOSSY BLUE

SKILL | FINISHES

FINISHES



Shiny white




Soft White

GLASS FINISHES




Clear


STRIPES FINISHES




Glossy Blue
cod N0




Light grey
cod N1



Dove grey
cod N2



Pearl grey
cod N3



Soft White
cod U

SKILL | FUNCTIONS AND EQUIPMENT (available depending on the model)



Manual or Thermostatic mixer and Hand shower



Dome with Shower head



Body hydromassage



Cascade



Soap holder



Bluetooth



Foldaway seat




Electronic soft-touch control panel




Chromolight (hammam version)
Led ceiling (essential version)



Steam generator + Steam and aroma dispenser

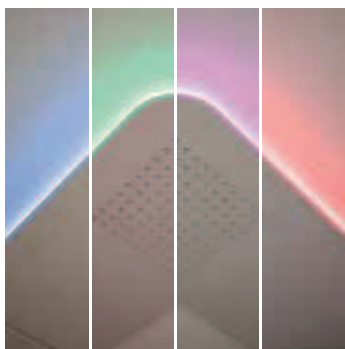

Immerse yourself in an emotional bath of lights with integrated Chromolight in the roof

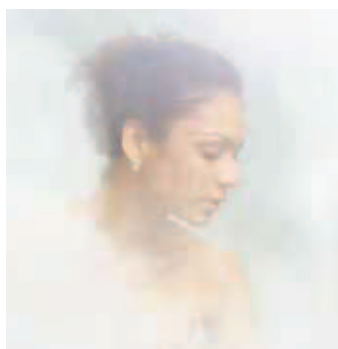

Massage the body with one soft steam cloud and aromas of essential oils





Capacitive control simple and safe to use




Foldable seat to fit all uses of the cabin.





SKILL

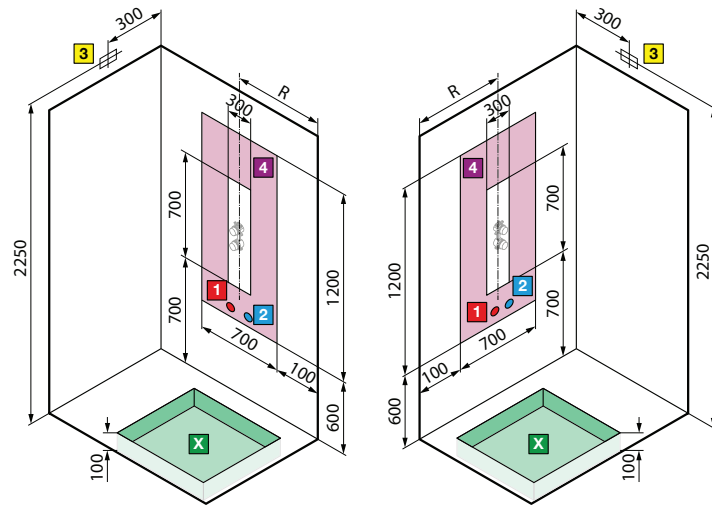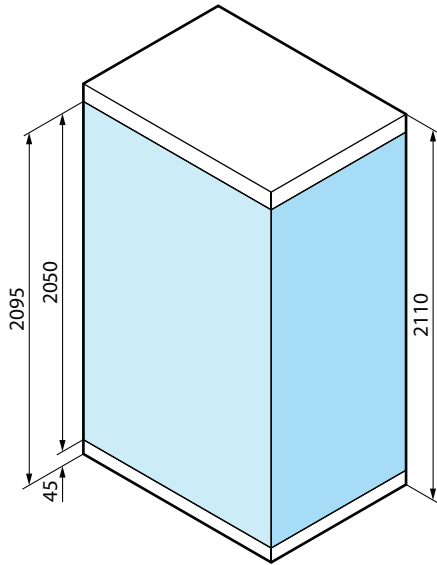

left version right version
for model **A100x80 - A120x80 - A120x90 - A120x100**

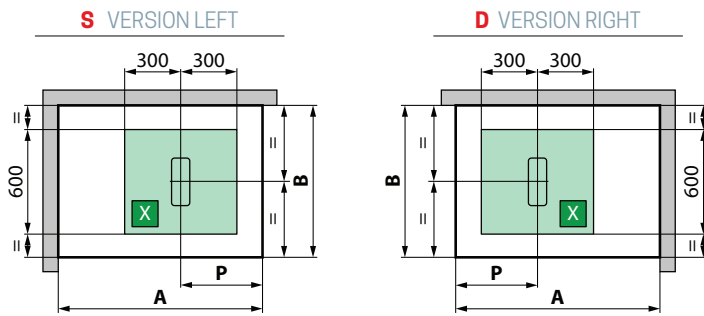

model	A ± 2	B ± 2	P	R
A100x80	1000	800	400	450
A120x80	1200	800	500	550
A120x90	1200	900	500	550
A120x100	1200	1000	500	550
2P140x80	1400	800	600	650




EN55014-1
EN55014-2
The product is certified according to electromagnetic compatibility standards

WARNING!
It could be dangerous for pacemaker wearer



HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.



Visual inspection not possible

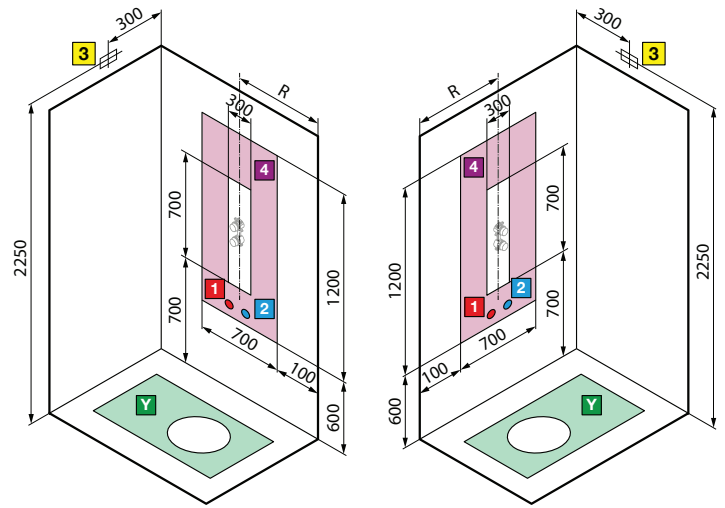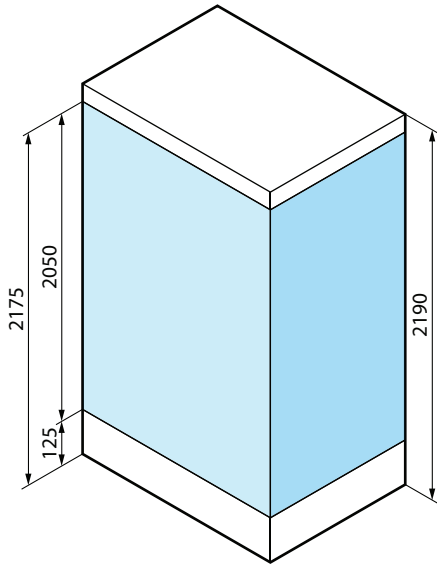


left version


right version

for model **A100x80 - A120x80 - A120x90 - A120x100**



S VERSION LEFT

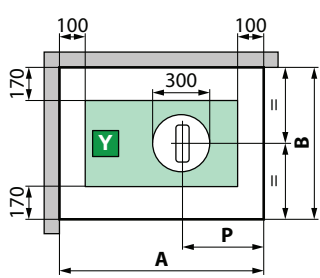


D VERSION RIGHT

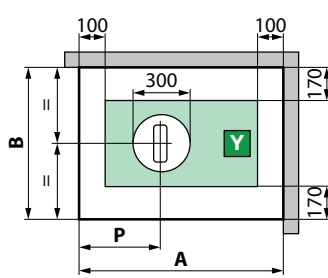

model	A ± 2	B ± 2	P	R
A100x80	1000	800	400	450
A120x80	1200	800	500	550
A120x90	1200	900	500	550
A120x100	1200	1000	500	550
2P140x80	1400	800	600	650



Visual inspection not possible



EN55014-1
EN55014-2

The product is certified according to electromagnetic compatibility standards



WARNING!

It could be dangerous for pacemaker wearer

HYDRAULIC CHARACTERISTICS:

Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:

Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.