

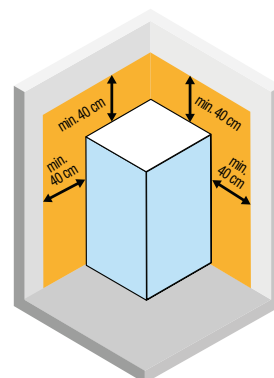
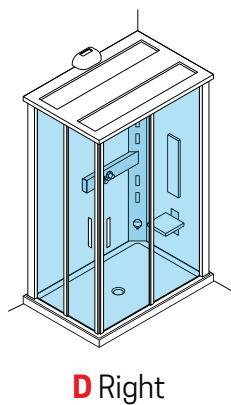


[illegible]

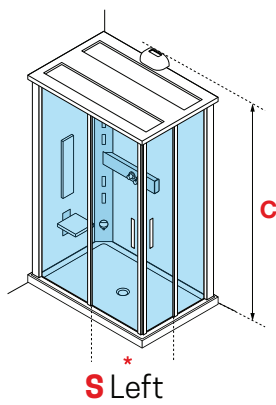

**NEXIS A BURLINGTON**

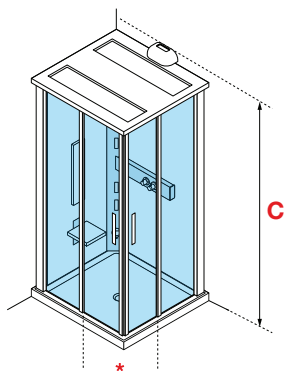

**RECIRCULATED  
AIR IN THE  
BATHROOM MUST  
BE GUARANTEED.**




NEXIS A BURLINGTON



NEXIS A WHITE OAK

## NEXIS | FINISHES

### STRUCTURE FINISHES




Chrome  
code K

### STRIPES FINISHES



White wood  
code A



Grain  
code M




White oak  
code Q


### GLASS FINISHES




Clear  
thickness 8 mm



Back walls glass  
thickness 5 mm



Burlington  
code N



Wenge  
code V

## NEXIS | FUNCTIONS AND EQUIPMENT (available depending on the model)




- Manual or Thermostatic mixer and Hand shower
- Dome with Shower head
- Body hydromassage
- Soap holder
- Bluetooth
- Foldaway seat
- Touch screen remote control  
Adjustable steam generator, radio, clock, alarm
- Chromolight
- Steam generator + Steam and aroma dispenser




**NEXIS DUAL GRAIN**




Folding seat + Back in leafy HPL in wooden finish



Dome with integrated overhead shower head



A symphony of light and colour for a crescendo of sensorial emotions





Massage the body with one soft steam cloud and aromas of essential oils




# NEXIS

NEXIS SHOWER TRAY 80 MM


TECHNICAL DATA

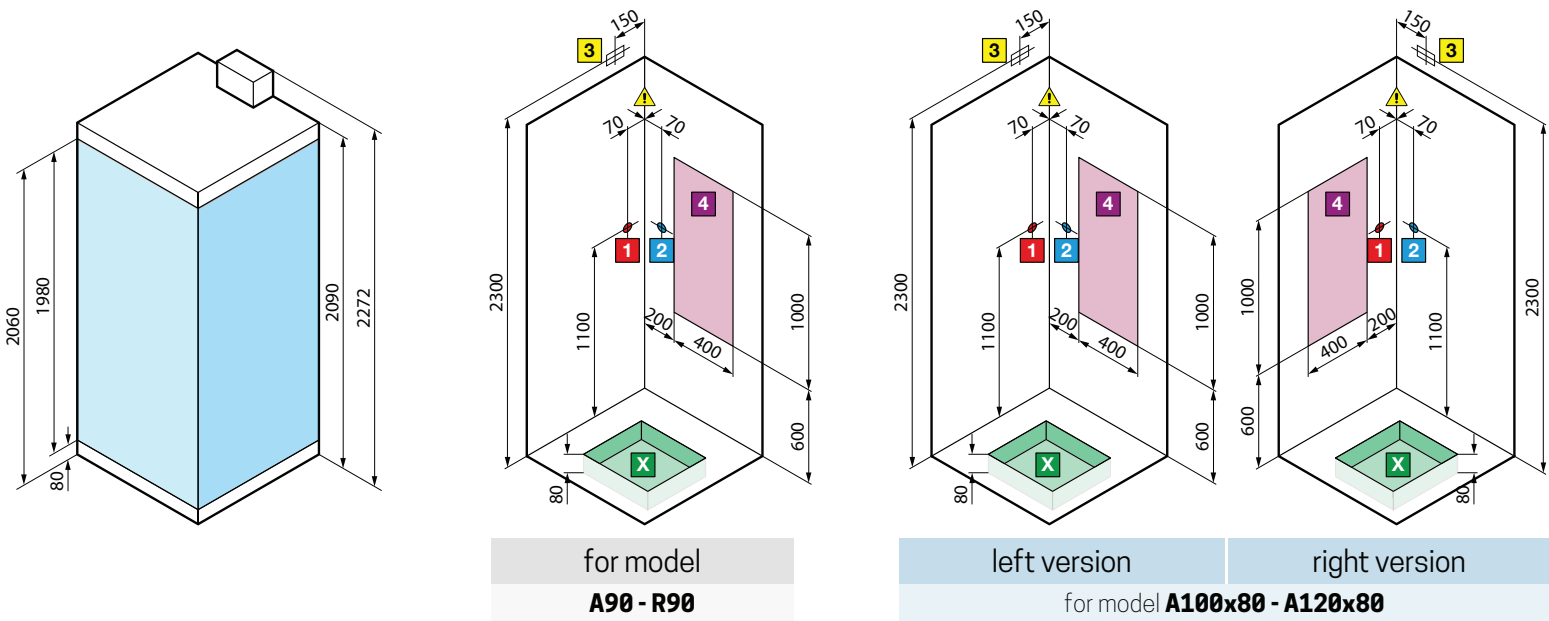


| model      | A ± 2 | B ± 2 | C   | D   | E   | F   |
|------------|-------|-------|-----|-----|-----|-----|
| <b>A90</b> | 900   | 900   | 150 | 500 | 450 | 275 |



| model      | A ± 2 | B ± 2 | C   | D   | E   | F   |
|------------|-------|-------|-----|-----|-----|-----|
| <b>R90</b> | 900   | 900   | 150 | 500 | 450 | 275 |

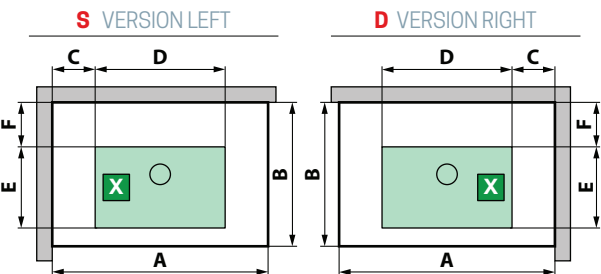

| model          | A ± 2 | B ± 2 | C   | D   | E   | F   |
|----------------|-------|-------|-----|-----|-----|-----|
| <b>A100x80</b> | 1000  | 800   | 200 | 500 | 450 | 220 |
| <b>A120x80</b> | 1200  | 800   | 200 | 600 | 450 | 220 |

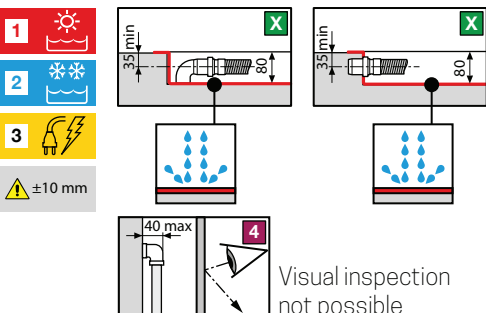



 **EN55014-1**  
**EN55014-2**  
The product is certified according  
to electromagnetic compatibility  
standards

 **WARNING!**  
It could be dangerous for  
pacemaker wearer


**HYDRAULIC CHARACTERISTICS:**  
Optimal dynamic pressure 2÷5 bar  
Hot water 1/2"  
Cold water 1/2"  
Drain connection ø 40 mm

**ELECTRICAL CHARACTERISTIC:**  
Supply voltage: 220-230 V  
Frequency: 50/60 Hz  
Maximum absorbed power: 2600 W  
Nominal power rating: 2500 W


**WARNING!** Install a 30mA differential switch upstream of the appliance  
with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

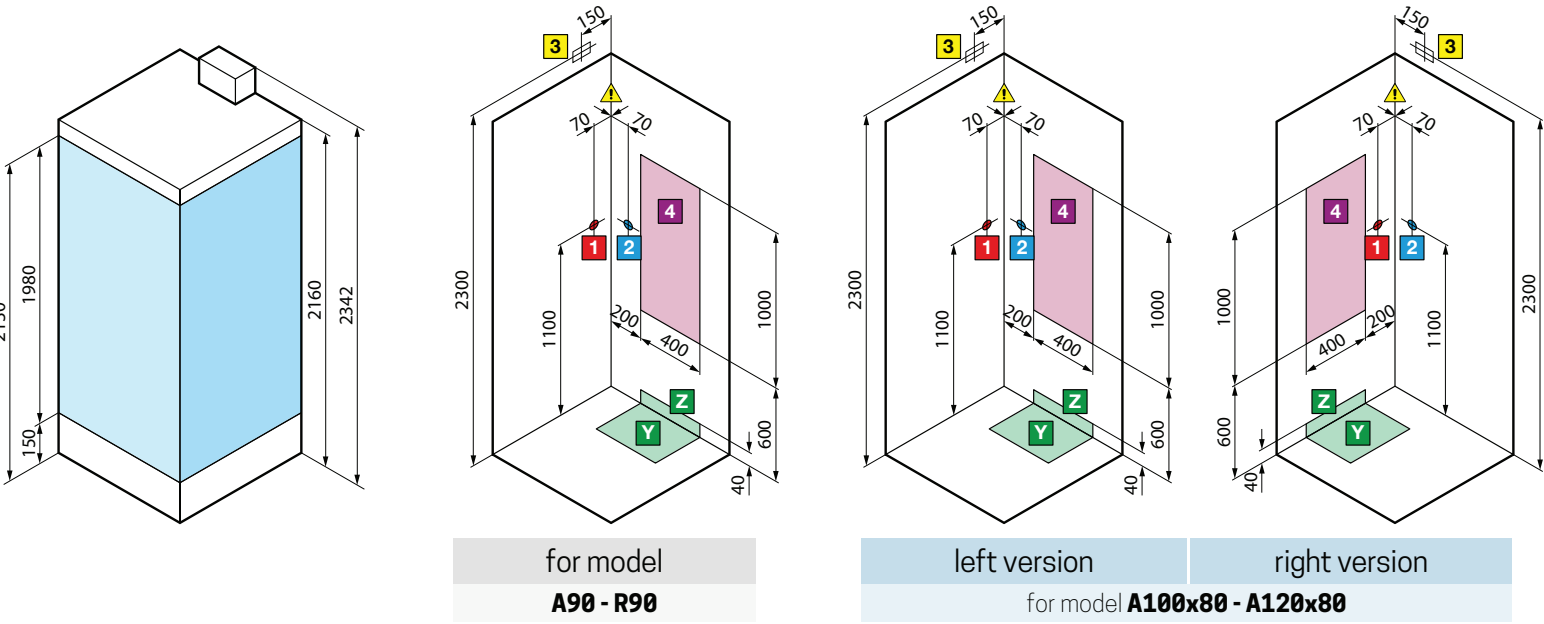


| model      | A ± 4 | B ± 4 | C   | D   | E   |
|------------|-------|-------|-----|-----|-----|
| <b>A90</b> | 900   | 900   | 200 | 500 | 300 |



| model      | A ± 4 | B ± 4 | C   | D   | E   |
|------------|-------|-------|-----|-----|-----|
| <b>R90</b> | 900   | 900   | 200 | 500 | 300 |

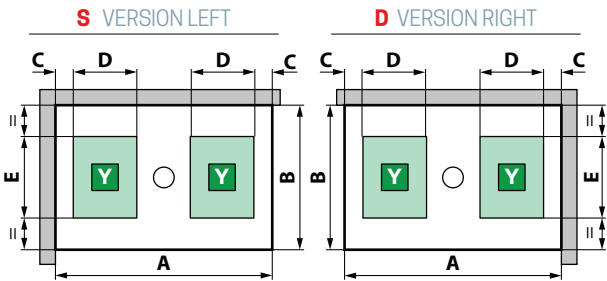

| model          | A ± 4 | B ± 4 | C   | D   | E   |
|----------------|-------|-------|-----|-----|-----|
| <b>A100x80</b> | 1000  | 800   | 100 | 250 | 450 |
| <b>A120x80</b> | 1200  | 800   | 100 | 350 | 450 |

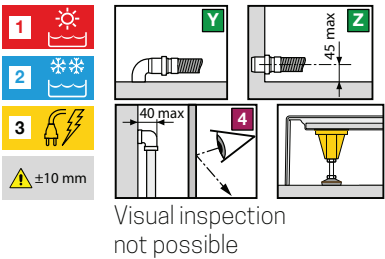

 **EN55014-1**  
**EN55014-2**  
The product is certified according  
to electromagnetic compatibility  
standards

 **WARNING!**  
It could be dangerous for  
pacemaker wearer

**HYDRAULIC CHARACTERISTICS:**  
Optimal dynamic pressure 2÷5 bar  
Hot water 1/2"  
Cold water 1/2"  
Drain connection ø 40 mm

**ELECTRICAL CHARACTERISTIC:**  
Supply voltage: 220-230 V  
Frequency: 50/60 Hz  
Maximum absorbed power: 2600 W  
Nominal power rating: 2500 W

**WARNING!** Install a 30mA differential switch upstream of the appliance  
with a multiple-pole switch with a minimum contact opening ≥ 3 mm.