


# GLAX 1 2.0 A




## CORNER ENTRY, 2 SLIDING DOORS + 2 FIXED PANELS

Design Marco Pellici


Dimensions				Code	Installation		Mixer		Glass	Select the finishing		
Dimensions (cm)	Shower tray (cm)	Total height (cm)	Access (cm)		D	S	M	T	1	UU	HH	BB
		<b>C</b>	*		Right	Left	Manual	Thermostatic	Clear	White soft	Black	Silver
<b>STANDARD</b>												
					D	S	M-	T-	1	UU	HH	BB
80 X 80	4,5	210	40	<b>G21A80</b>	-	-						
80 X 80	11,5	217	40	<b>G21A89</b>	-	-						
90 X 90	4,5	210	47	<b>G21A90</b>	-	-						
90 X 90	11,5	217	47	<b>G21A99</b>	-	-						
100 X 100	4,5	210	54	<b>G21A100</b>	-	-						
100 X 100	11,5	217	54	<b>G21A109</b>	-	-						
90 X 70	4,5	210	40	<b>G21A9070</b>								
90 X 70	11,5	217	40	<b>G21A9079</b>								
100 X 70	4,5	210	43,5	<b>G21A107</b>								
100 X 70	11,5	217	43,5	<b>G21A197</b>								
100 X 80	4,5	210	47,5	<b>G21A108</b>								
100 X 80	11,5	217	47,5	<b>G21A198</b>								
<b>STANDARD + DOME</b>												
					D	S	MF-	TF-	1	UU	HH	BB
80 X 80	4,5	210	40	<b>G21A80</b>	-	-						
80 X 80	11,5	217	40	<b>G21A89</b>	-	-						
90 X 90	4,5	210	47	<b>G21A90</b>	-	-						
90 X 90	11,5	217	47	<b>G21A99</b>	-	-						
100 X 100	4,5	210	54	<b>G21A100</b>	-	-						
100 X 100	11,5	217	54	<b>G21A109</b>	-	-						
90 X 70	4,5	210	40	<b>G21A9070</b>								
90 X 70	11,5	217	40	<b>G21A9079</b>								
100 X 70	4,5	210	43,5	<b>G21A107</b>								
100 X 70	11,5	217	43,5	<b>G21A197</b>								
100 X 80	4,5	210	47,5	<b>G21A108</b>								
100 X 80	11,5	217	47,5	<b>G21A198</b>								
<b>STANDARD + DOME + LIGHT</b>												
					D	S	MF-	TF-	1	UU	HH	BB
80 X 80	4,5	210	40	<b>G21A80</b>	-	-						
80 X 80	11,5	217	40	<b>G21A89</b>	-	-						
90 X 90	4,5	210	47	<b>G21A90</b>	-	-						
90 X 90	11,5	217	47	<b>G21A99</b>	-	-						
100 X 100	4,5	210	54	<b>G21A100</b>	-	-						
100 X 100	11,5	217	54	<b>G21A109</b>	-	-						
90 X 70	4,5	210	40	<b>G21A9070</b>								
90 X 70	11,5	217	40	<b>G21A9079</b>								
100 X 70	4,5	210	43,5	<b>G21A107</b>								
100 X 70	11,5	217	43,5	<b>G21A197</b>								
100 X 80	4,5	210	47,5	<b>G21A108</b>								
100 X 80	11,5	217	47,5	<b>G21A198</b>								
<b>SAUNA BASIC</b>												
					D	S	M5-	T5-	1	UU	HH	BB
80 X 80	4,5	210	40	<b>G21A80</b>	-	-						
80 X 80	11,5	217	40	<b>G21A89</b>	-	-						
90 X 90	4,5	210	47	<b>G21A90</b>	-	-						
90 X 90	11,5	217	47	<b>G21A99</b>	-	-						
100 X 100	4,5	210	54	<b>G21A100</b>	-	-						
100 X 100	11,5	217	54	<b>G21A109</b>	-	-						
90 X 70	4,5	210	40	<b>G21A9070</b>								
90 X 70	11,5	217	40	<b>G21A9079</b>								
100 X 70	4,5	210	43,5	<b>G21A107</b>								
100 X 70	11,5	217	43,5	<b>G21A197</b>								
100 X 80	4,5	210	47,5	<b>G21A108</b>								
100 X 80	11,5	217	47,5	<b>G21A198</b>								



**GLAX 1 2.0 A SILVER**

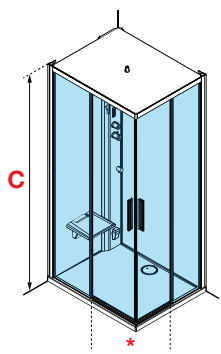

**S** Left

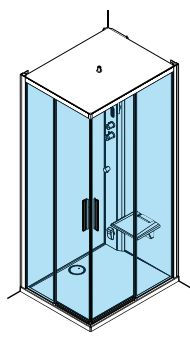

**D** Right



## GLAX 1 2.0 | FINISHES

	PROFILE	HANDLES	EQUIPPED PANEL	SOAP HOLDER	BACK WALL PANELS	SHOWER TRAY	DOME *	SEAT *
<b>WHITE</b>	Soft white	Soft white	Soft white	Soft white	White	Shiny white	Soft white	White
<b>BLACK</b>	Soft black	Soft black	Soft black	Soft black	White	Shiny white	Soft white	White
<b>SILVER</b>	Silver	Chrome	Silver	Chrome	White	Shiny white	Soft white	White

\* available depending on the model

## GLAX 1 2.0 | FUNCTIONS AND EQUIPMENT (available depending on the model)



- Manual or Thermostatic mixer and Hand shower
- Dome with Shower head
- Soap holder
- Bluetooth
- Foldaway seat
- Electronic soft-touch control panel
- Chromolight (hammam version) Led ceiling (essential version)
- Steam generator + Steam and aroma dispenser



GLAX 1 2.0 2P WHITE



Clean and contemporary design with large glass surfaces and few profiles. The glass roof is integrated into the edge of the top profiles



Foldaway seat





The white or Chromolight programming of the colors is elegantly integrated into the column.




Emotional and sensorial experience by the steam generator and aroma diffuser.

# GLAX 1 2.0




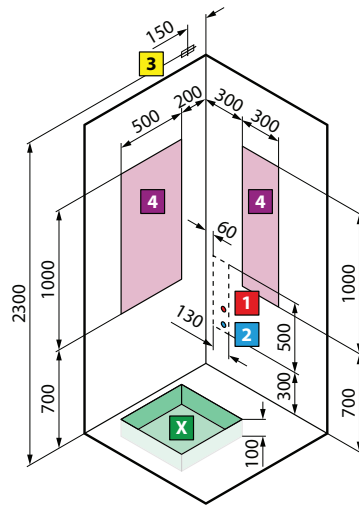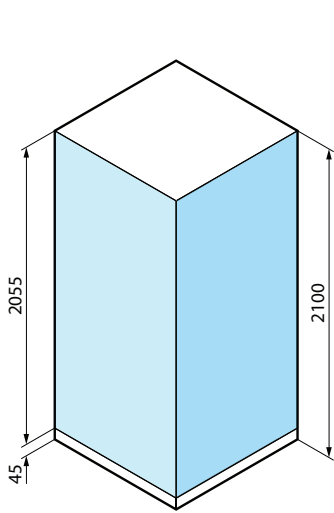


for model  
**A80 - A90 - A100 - GF80 -  
GF90 - R90 - R100**

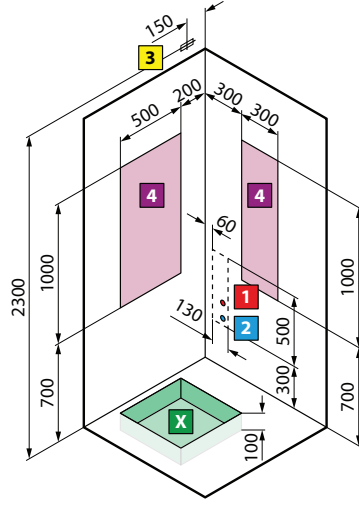



right version      left version  
for model **A90x70 - A100x70 - A100x80 -  
2P120x80 - 2P120x90**




model	A ± 3	B ± 3
<b>A80</b>	796	796
<b>A90</b>	896	896
<b>A 100</b>	996	996
<b>GF80</b>	796	796
<b>GF90</b>	896	896



model	A ± 3	B ± 3
<b>R90</b>	896	896
<b>R100</b>	996	996



model	A ± 3	B ± 3
<b>A90x70</b>	896	696
<b>A100x70</b>	996	696
<b>A100x80</b>	996	796
<b>2P120x80</b>	1196	796
<b>2P120x90</b>	1196	896


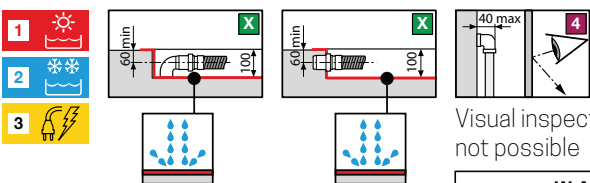


**WARNING!**  
It could be dangerous for  
pacemaker wearer


**HYDRAULIC CHARACTERISTICS:**  
Optimal dynamic pressure 2÷5 bar  
Hot water 1/2"  
Cold water 1/2"  
Drain connection ø 40 mm

**ELECTRICAL CHARACTERISTIC:**  
Supply voltage: 220-230 V  
Frequency: 50/60 Hz  
Maximum absorbed power: 2600 W  
Nominal power rating: 2500 W


**WARNING!** Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

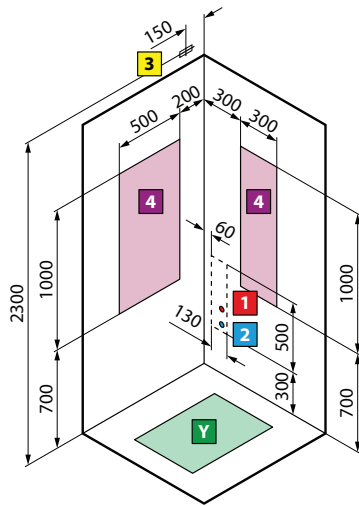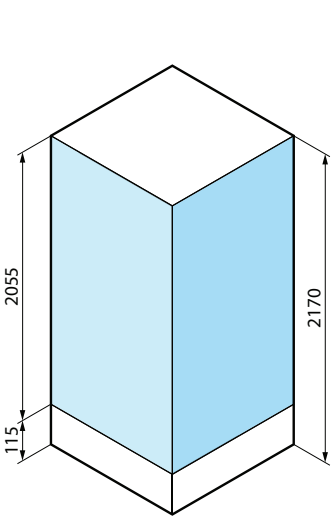


for model  
**A80 - A90 - A100 - GF80 - GF90 - R90 - R100**

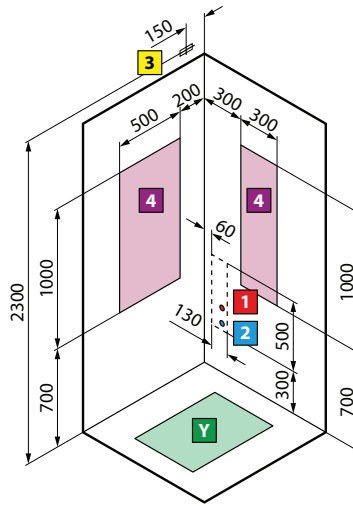

right version      left version  
for model **A90x70 - A100x70 - A100x80 - 2P120x80 - 2P120x90**




model	A ± 4	B ± 4
<b>A80</b>	798	798
<b>A90</b>	898	898
<b>A 100</b>	998	998
<b>GF80</b>	798	798
<b>GF90</b>	898	898




model	A ± 4	B ± 4	E
<b>R90</b>	898	898	500
<b>R100</b>	998	998	600




**S** VERSION LEFT



**D** VERSION RIGHT



model	A ± 4	B ± 4
<b>A90x70</b>	898	698
<b>A100x70</b>	998	698
<b>A100x80</b>	998	798
<b>2P120x80</b>	1198	798
<b>2P120x90</b>	1198	898



Visual inspection not possible

**WARNING!**  
It could be dangerous for pacemaker wearer

**HYDRAULIC CHARACTERISTICS:**  
Optimal dynamic pressure 2÷5 bar  
Hot water 1/2"  
Cold water 1/2"  
Drain connection ø 40 mm

**ELECTRICAL CHARACTERISTIC:**  
Supply voltage: 220-230 V  
Frequency: 50/60 Hz  
Maximum absorbed power: 2600 W  
Nominal power rating: 2500 W

**WARNING!** Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.