

GLAX 1 2.0 G+F





PIVOT DOOR + SIDE PANEL

Design Marco Pellici

Dimensions				Code	Installation		Mixer		Glass	Select the finishing		
Dimensions (cm)	Shower tray (cm)	Total height (cm)	Access (cm)		D	S	M	T	1	UU	HH	BB
		C	*		Right	Left	Manual	Thermo-static	Clear	White soft	Black	Silver
STANDARD												
					D	S	M-	T-	1	UU	HH	BB
80 X 80	4,5	210	61	G21GF80								
80 X 80	11,5	217	61	G21GF89								
90 X 90	4,5	210	71	G21GF90								
90 X 90	11,5	217	71	G21GF99								
STANDARD + DOME												
					D	S	MF-	TF-	1	UU	HH	BB
80 X 80	4,5	210	61	G21GF80								
80 X 80	11,5	217	61	G21GF89								
90 X 90	4,5	210	71	G21GF90								
90 X 90	11,5	217	71	G21GF99								
STANDARD + DOME + LIGHT												
					D	S	MF-	TF-	1	UU	HH	BB
80 X 80	4,5	210	61	G21GF80								
80 X 80	11,5	217	61	G21GF89								
90 X 90	4,5	210	71	G21GF90								
90 X 90	11,5	217	71	G21GF99								
SAUNA BASIC												
					D	S	M5-	T5-	1	UU	HH	BB
80 X 80	4,5	210	61	G21GF80								
80 X 80	11,5	217	61	G21GF89								
90 X 90	4,5	210	71	G21GF90								
90 X 90	11,5	217	71	G21GF99								



GLAX 1 2.0 G BLACK

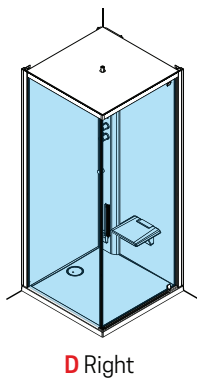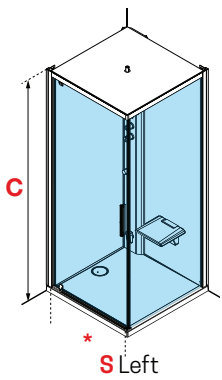



GLAX 1 2.0 | FINISHES

	PROFILE	HANDLES	EQUIPPED PANEL	SOAP HOLDER	BACK WALL PANELS	SHOWER TRAY	DOME *	SEAT *
WHITE	Soft white	Soft white	Soft white	Soft white	White	Shiny white	Soft white	White
BLACK	Soft black	Soft black	Soft black	Soft black	White	Shiny white	Soft white	White
SILVER	Silver	Chrome	Silver	Chrome	White	Shiny white	Soft white	White

* available depending on the model

GLAX 1 2.0 | FUNCTIONS AND EQUIPMENT (available depending on the model)



-   Manual or Thermostatic mixer and Hand shower
-   Dome with Shower head
-  Soap holder
-  Bluetooth
-  Foldaway seat
-  Electronic soft-touch control panel
-   Chromolight (hammam version) Led ceiling (essential version)
-  Steam generator + Steam and aroma dispenser



GLAX 1 2.0 2P WHITE



Clean and contemporary design with large glass surfaces e few profiles. The glass roof is integrated into the edge of the top profiles



Foldaway seat





The white or Chromolight programming of the colors is elegantly integrated into the column.




Emotional and sensorial experience by the steam generator and aroma diffuser.

GLAX 1 2.0




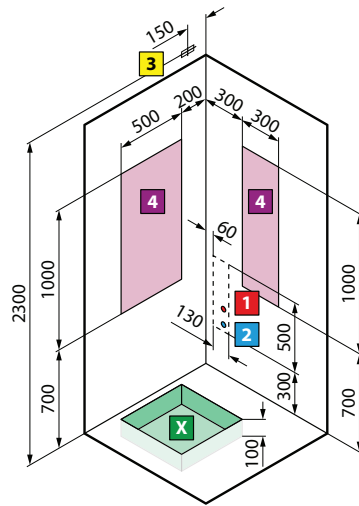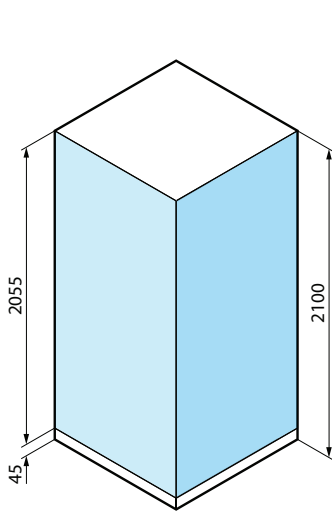


for model
**A80 - A90 - A100 - GF80 -
GF90 - R90 - R100**

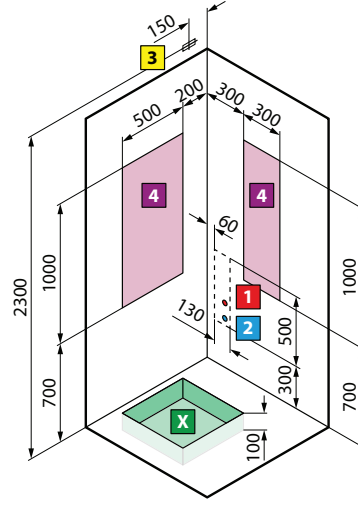



right version left version
for model **A90x70 - A100x70 - A100x80 -
2P120x80 - 2P120x90**




model	A ± 3	B ± 3
A80	796	796
A90	896	896
A 100	996	996
GF80	796	796
GF90	896	896



model	A ± 3	B ± 3
R90	896	896
R100	996	996



model	A ± 3	B ± 3
A90x70	896	696
A100x70	996	696
A100x80	996	796
2P120x80	1196	796
2P120x90	1196	896

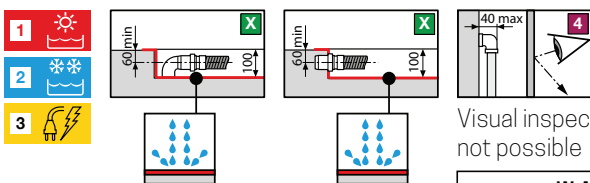



Visual inspection
not possible

WARNING!
It could be dangerous for
pacemaker wearer


HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W


WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.

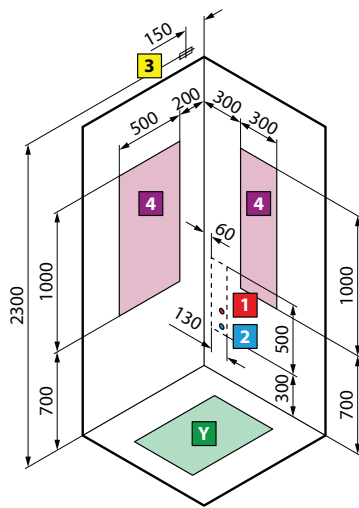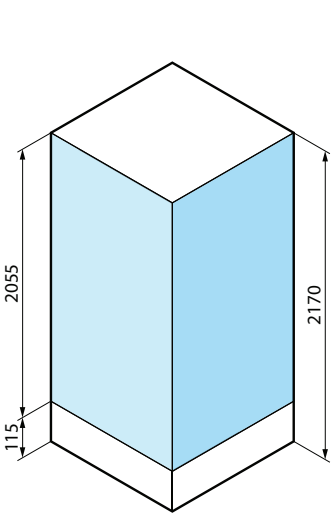


for model
A80 - A90 - A100 - GF80 - GF90 - R90 - R100

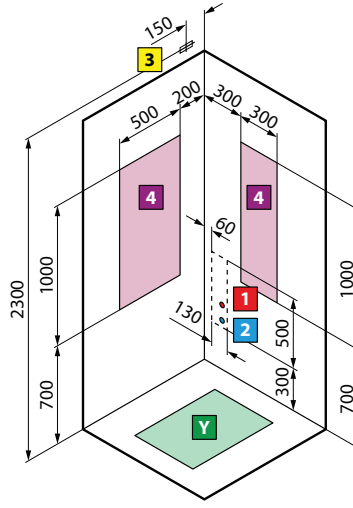



right version left version
for model **A90x70 - A100x70 - A100x80 - 2P120x80 - 2P120x90**



model	A ± 4	B ± 4
A80	798	798
A90	898	898
A100	998	998
GF80	798	798
GF90	898	898



model	A ± 4	B ± 4	E
R90	898	898	500
R100	998	998	600



model	A ± 4	B ± 4
A90x70	898	698
A100x70	998	698
A100x80	998	798
2P120x80	1198	798
2P120x90	1198	898

WARNING!
It could be dangerous for pacemaker wearer

Visual inspection not possible

HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.