




## MULTIFUNCTION SHOWER CUBICLE WITH 1 PIVOT DOOR, FOR RECESS INSTALLATION

Dimensions				Code	Mixer		Hydro-massage	Glass	Select the finishing					
Dimensions (cm)	Shower tray (cm)	Total height (cm)	Access (cm)		M	T			Shiny white panel			Matt white panel		
				C	*	Manual	Thermo-static	1	AA	AB	AK	UA	UB	UK
								Clear	White	Silver	Chrome	White	Silver	Chrome
<b>STANDARD WITHOUT DOME (RECESS)</b>														
					M-	T-		1	AA	AB	AK	UA	UB	UK
80x80	4,5	209,5	56	<b>EONGN80</b>			-							
80x80	11,5	216,5	56	<b>EONGN89</b>			-							
90x90	4,5	209,5	66	<b>EONGN90</b>			-							
90x90	11,5	216,5	66	<b>EONGN99</b>			-							
<b>STANDARD WITH DOME + LIGHT (RECESS)</b>														
					M	T	T-	1	AA	AB	AK	UA	UB	UK
80x80	4,5	214	56	<b>EONGN80</b>										
80x80	11,5	221	56	<b>EONGN89</b>										
90x90	4,5	214	66	<b>EONGN90</b>										
90x90	11,5	221	66	<b>EONGN99</b>										
<b>HYDRO WITHOUT DOME (RECESS)</b>														
					M	T	1-	1	AA	AB	AK	UA	UB	UK
80x80	4,5	209,5	56	<b>EONGN80</b>										
80x80	11,5	216,5	56	<b>EONGN89</b>										
90x90	4,5	209,5	66	<b>EONGN90</b>										
90x90	11,5	216,5	66	<b>EONGN99</b>										
<b>HYDRO WITH DOME + SHOWER HEAD + LIGHT</b>														
					M	T	1F-	1	AA	AB	AK	UA	UB	UK
80x80	4,5	214	56	<b>EONGN80</b>										
80x80	11,5	221	56	<b>EONGN89</b>										
90x90	4,5	214	66	<b>EONGN90</b>										
90x90	11,5	221	66	<b>EONGN99</b>										
<b>HAMMAM (CHROMOLIGHT WITH REMOTE CONTROL FOR RECESS)</b>														
					M	T	1N-	1	AA	AB	AK	UA	UB	UK
80x80	4,5	229,5	56	<b>EONGN80</b>										
80x80	11,5	236,5	56	<b>EONGN89</b>										
90x90	4,5	229,5	66	<b>EONGN90</b>										
90x90	11,5	236,5	66	<b>EONGN99</b>										



EON G FOR RECESS HAMMAM CHROME

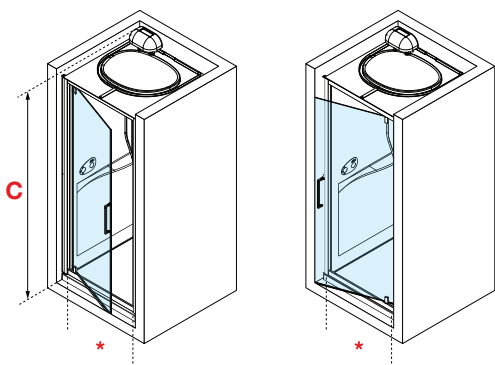

OPTIONAL



OPAL ACRYLIC SEAT

Code

Price

**SED030PL**



EON 2P HAMMAM WHITE




EON A HAMMAM SILVER




EON G HAMMAM CHROME

## EON | FINISHES


### STRUCTURE FINISHES



White  
code A




Silver  
code B



Chrome  
code K



Shiny white  
code A



Soft white  
code U

### GLASS FINISHES



Clear  
thickness 6 mm

## EON | FUNCTIONS AND EQUIPMENT (available depending on the model)



Manual or Thermostatic mixer and Hand shower

Dome with Shower head

Body hydromassage

Soap holder

Bluetooth

Remote control

Chromolight (hammam version)  
Led ceiling (for standard version  
and hydro with dome)

Steam generator



EON 2P HAMMAM CHROME



Manual or Thermostatic mixer



Integrated soap holder





Body hydromassage (8 jets)




Remote control  
(Only for Hammam version)




# EON

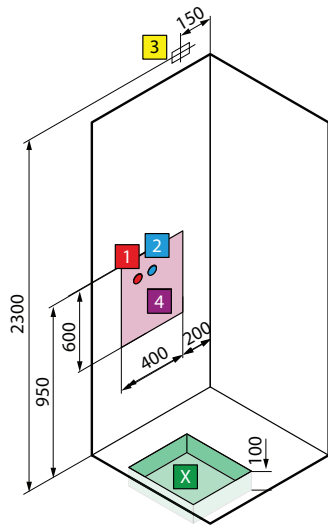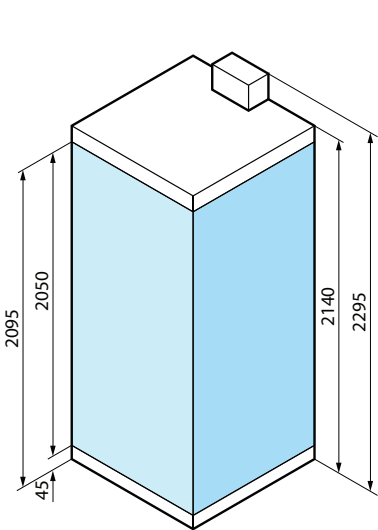



for model  
**GF/A80 - GF/A90 - G90 - R90**

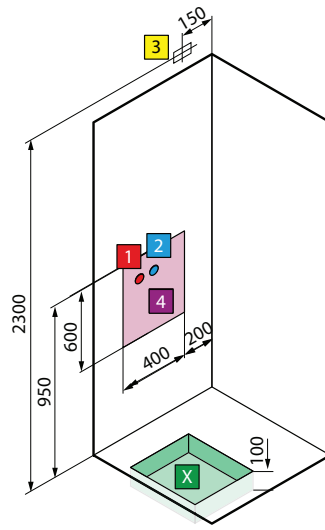


left version  
for model **A100x80 - 2P120x80 - 2P120x90 - 2P120**

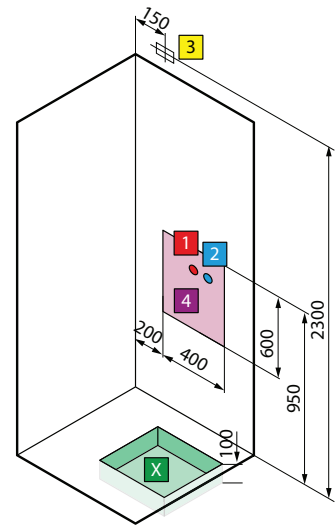

right version






model	A ± 4	B ± 4
<b>GF/A80</b>	802	802
<b>GF/A90</b>	902	902
<b>G90</b>	902	902






model	A ± 4	B ± 4
<b>R90</b>	902	902

### S VERSION LEFT

### D VERSION RIGHT



model	A ± 4	B ± 4
<b>A100x80</b>	1002	802
<b>2P120x80</b>	1202	802
<b>2P120x90</b>	1202	902
<b>2P120x80/90</b>	1202	902



Visual inspection not possible

**WARNING!**  
It could be dangerous for pacemaker wearer



### HYDRAULIC CHARACTERISTICS:

Optimal dynamic pressure 2÷5 bar  
Hot water 1/2"  
Cold water 1/2"  
Drain connection  $\varnothing$  40 mm


### ELECTRICAL CHARACTERISTIC:

Supply voltage: 220-230 V  
Frequency: 50/60 Hz  
Nominal power rating: 2500 W  
Maximum absorbed power  
HAMMAM: 2600 W  
BASE and IDRO: 50 W


**WARNING!** Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening  $\geq$  3 mm.

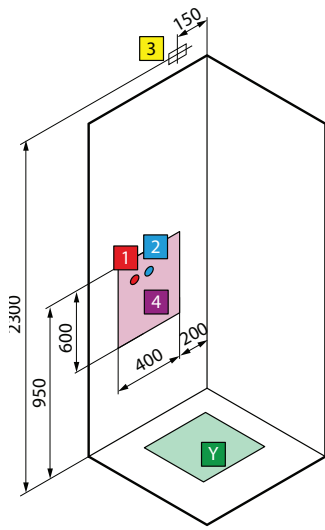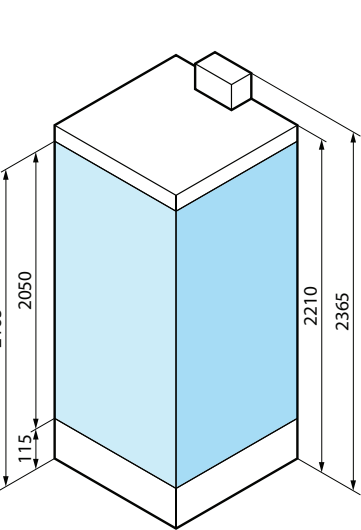



for model  
**GF/A80 - GF/A90 - G90 - R90**

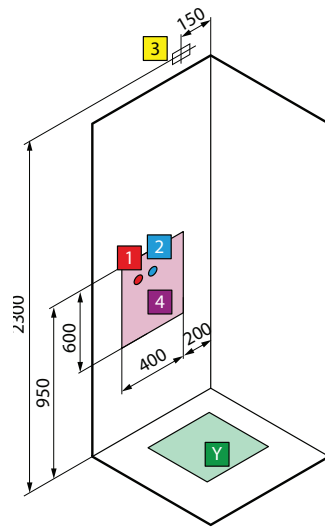


left version  
for model **A100x80 - 2P120x80 - 2P120x90 - 2P120**

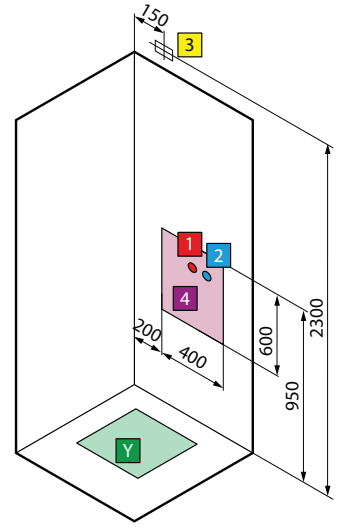

right version  
for model **A100x80 - 2P120x80 - 2P120x90 - 2P120**






model	A ± 4	B ± 4	C	D	E
<b>GF/A80</b>	802	802	150	400	400
<b>GF/A90</b>	902	902	150	500	500
<b>G90</b>	902	902	150	500	500






model	A ± 4	B ± 4	C	D	E
<b>R90</b>	902 ± 4	902	156	500	500

### S VERSION LEFT

### D VERSION RIGHT



model	A ± 4	B ± 4	C	D	E
<b>A100x80</b>	1002	802	150	600	400
<b>2P120x80</b>	1202	802	150	800	400
<b>2P120x90</b>	1202	902	150	800	500
<b>2P120x80/90</b>	1202	902	150	800	500



Visual inspection  
not possible



### HYDRAULIC CHARACTERISTICS:

Optimal dynamic pressure 2÷5 bar  
Hot water 1/2"  
Cold water 1/2"  
Drain connection ø 40 mm

### ELECTRICAL CHARACTERISTIC:

Supply voltage: 220-230 V  
Frequency: 50/60 Hz  
Nominal power rating: 2500 W  
Maximum absorbed power  
HAMMAM: 2600 W  
BASE and IDRO: 50 W

**WARNING!** Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.