

GLAX 2 2.0 R



MULTIFUNCTION COMPLETE STEAM CUBICLE - QUADRANT - 2 SLIDING DOORS + 2 FIXED PANELS

Design Marco Pellici

| Dimensions | | | | Code | Mixer | Glass | Select the finishing | | | | |
|-------------------|------------------|-------------------|-------------|----------------|--------------|----------|----------------------|-------------|-----------|-----------|-----------|
| Dimensions (cm) | Shower tray (cm) | Total height (cm) | Access (cm) | | T | 1 | UH | UU | HU | BB | TU |
| | | C | * | | Thermostatic | Clear | White | Total White | Black | Silver | Corda |
| HYDRO | | | | | | | | | | | |
| | | | | | T1- | 1 | UH | UU | HU | BB | TU |
| 90 X 90 | H 4,5 | 215 | 49 | G22R90 | | | | | | | |
| 90 X 90 | H 11,5 | 222 | 49 | G22R99 | | | | | | | |
| 100 X 100 | H 4,5 | 215 | 49 | G22R100 | | | | | | | |
| 100 X 100 | H 11,5 | 222 | 49 | G22R109 | | | | | | | |
| HYDRO PLUS | | | | | | | | | | | |
| | | | | | T1L- | 1 | UH | UU | HU | BB | TU |
| 90 X 90 | H 4,5 | 215 | 49 | G22R90 | | | | | | | |
| 90 X 90 | H 11,5 | 222 | 49 | G22R99 | | | | | | | |
| 100 X 100 | H 4,5 | 215 | 49 | G22R100 | | | | | | | |
| 100 X 100 | H 11,5 | 222 | 49 | G22R109 | | | | | | | |
| HAMMAM | | | | | | | | | | | |
| | | | | | T5- | 1 | UH | UU | HU | BB | TU |
| 90 X 90 | H 4,5 | 215 | 49 | G22R90 | | | | | | | |
| 90 X 90 | H 11,5 | 222 | 49 | G22R99 | | | | | | | |
| 100 X 100 | H 4,5 | 215 | 49 | G22R100 | | | | | | | |
| 100 X 100 | H 11,5 | 222 | 49 | G22R109 | | | | | | | |

STEAM-LINE GENERATOR - AUTOMATICALLY PURGES SYSTEM TO PREVENT LIMESCALE BUILD-UP. LOW MAINTENANCE. NO FILTER REQUIRED

REQUIRED



COMPULSORY
Imperial to Metric flex waste adaptor

| Code | Price |
|----------------|-------|
| RISCCAB | |

Construction of the code:

Code + **Installation** + **Mixer** + **Glass** + **Finishes** = Final product code


IN STOCK UK

(Other products)
Please check availability





GLAX 2 2.0

GLAX 2 2.0 R SILVER





GLAX 2.0 SHOWER TRAY 45 MM


TECHNICAL DATA

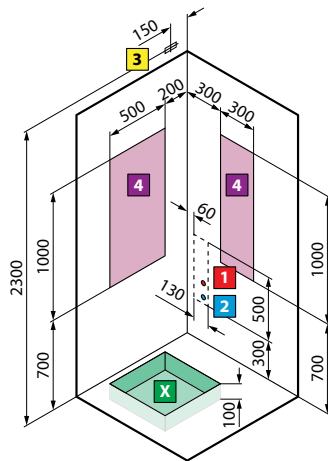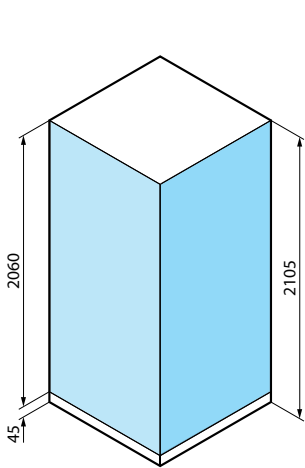


for model
**A80 - A90 - A100 - GF80 -
GF90 - R90 - R100**

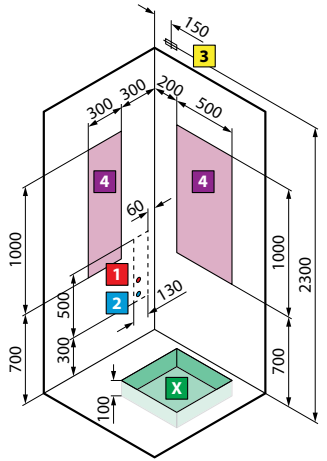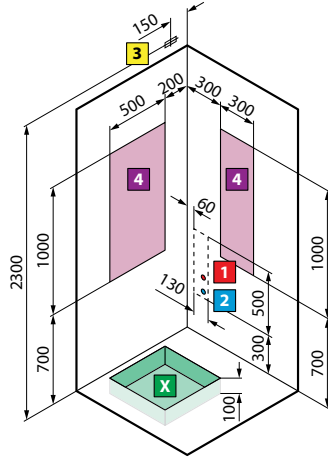

right version left version
for model **A90x70 - A100x70 - A100x80 -
2P 120x80 - 2P 120x90**




| model | A ± 3 | B ± 3 |
|--------------|-------|-------|
| A80 | 796 | 796 |
| A90 | 896 | 896 |
| A 100 | 996 | 996 |
| GF80 | 796 | 796 |
| GF90 | 896 | 896 |




| model | A ± 3 | B ± 3 |
|-------------|-------|-------|
| R90 | 896 | 896 |
| R100 | 996 | 996 |




S VERSION LEFT



D VERSION RIGHT



| model | A ± 3 | B ± 3 |
|-----------------|-------|-------|
| A90x70 | 896 | 696 |
| A100x70 | 996 | 696 |
| A100x80 | 996 | 796 |
| 2P120x80 | 1196 | 796 |
| 2P120x90 | 1196 | 896 |



Visual inspection
not possible

WARNING!
It could be dangerous for
pacemaker wearer


HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.


GLAX 2.0 SHOWER TRAY 115 MM

TECHNICAL DATA

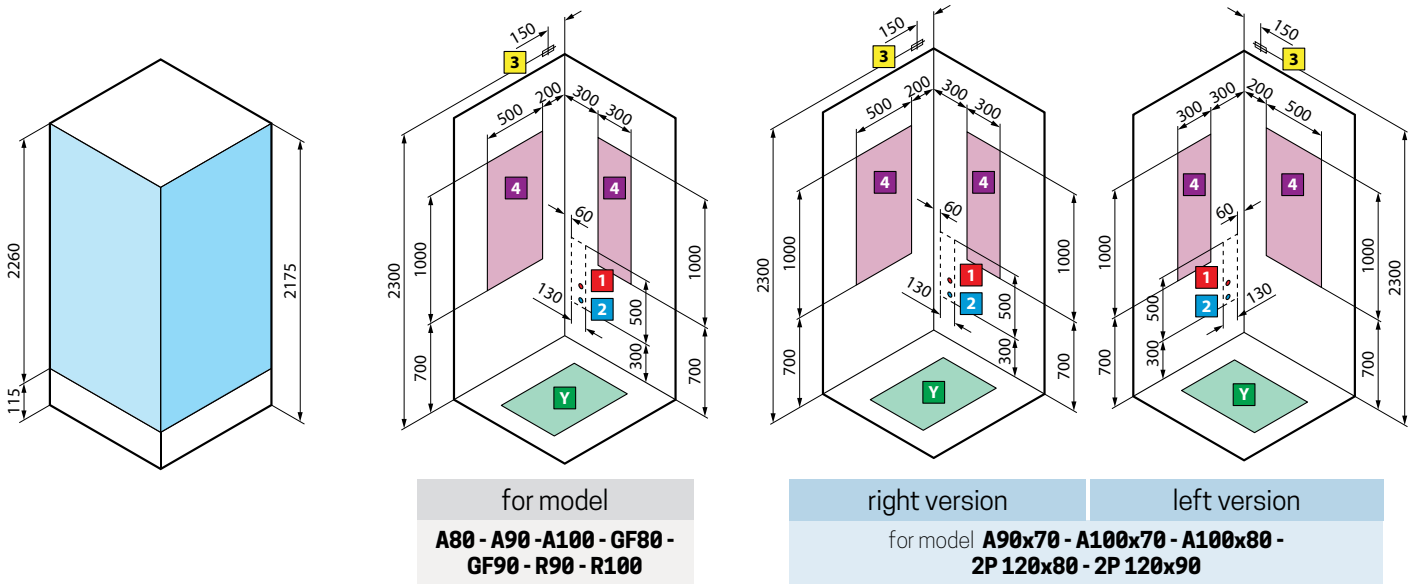


for model
A80 - A90 - A100 - GF80 - GF90 - R90 - R100

right version left version
for model **A90x70 - A100x70 - A100x80 - 2P120x80 - 2P120x90**




| model | A ± 4 | B ± 4 |
|--------------|-------|-------|
| A80 | 798 | 798 |
| A90 | 898 | 898 |
| A 100 | 998 | 998 |
| GF80 | 798 | 798 |
| GF90 | 898 | 898 |




| model | A ± 4 | B ± 4 | E |
|-------------|-------|-------|-----|
| R90 | 898 | 898 | 500 |
| R100 | 998 | 998 | 600 |





S VERSION LEFT



D VERSION RIGHT



| model | A ± 4 | B ± 4 |
|-----------------|-------|-------|
| A90x70 | 898 | 698 |
| A100x70 | 998 | 698 |
| A100x80 | 998 | 798 |
| 2P120x80 | 1198 | 798 |
| 2P120x90 | 1198 | 898 |



Visual inspection not possible

WARNING!
It could be dangerous for pacemaker wearer

HYDRAULIC CHARACTERISTICS:
Optimal dynamic pressure 2÷5 bar
Hot water 1/2"
Cold water 1/2"
Drain connection ø 40 mm

ELECTRICAL CHARACTERISTIC:
Supply voltage: 220-230 V
Frequency: 50/60 Hz
Maximum absorbed power: 2600 W
Nominal power rating: 2500 W

WARNING! Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening ≥ 3 mm.